

azbil

Thermal

Micro Flow Rate Liquid Flow Meter

Model F7M

Thermal Micro Flow Rate
Liquid Flow Meter that achieves
high-functionality measurement
and usability



Measures micro flow rates of several mL/min

- Operates on the thermal measurement principle using MEMS sensing technology. The measurement of micro flow rates of several mL/min, which traditionally has been difficult, is now possible. (Measurement range: 0.1 to 10 mL/min, 0.3 to 30mL/min, 0.5 to 50mL/min)



Compact, light-weight, and easy to install

- This model is more compact and lighter than its predecessors.
- By using the included mounting bracket, it can be easily installed on a surface (for horizontal pipe connection). It can also be installed for vertical pipe connection.



Flexible installation and wide range of fluids

- Compliant with IP65 protection rating.
- The non-metallic outer surface gives this product increased resistance to corrosives.
- Can be used with various fluids. (Fluids that do not corrode quartz glass or fluorocarbon resin)




Straight flow path

- The straight flow channel means pressure loss is lower and cleaning is easier, with no puddles of liquid.

External Dimensions

Unit: mm

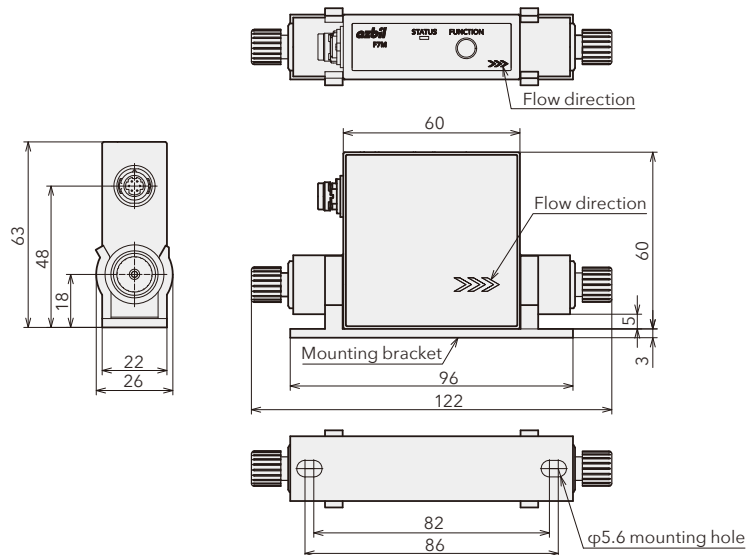

SPECIFICATIONS

Model No.	F7M9010	F7M9030	F7M9050
Measurable flow rate range (for water (H ₂ O))	0.1-10 mL/min	0.3-30 mL/min	0.5-50 mL/min
Measurement accuracy	$\pm 5\%$ rdg. (at 20% or more of the flow rate range), $\pm 1\%$ FS (at less than 20% of the range) The instrumental error in the volumetric flow rate was measured by Azbil's fluid flow rate calibration equipment under standard conditions*1		
Repeatability	$\pm 1\%$ rdg. (at 20% or more of the flow rate range), $\pm 0.2\%$ FS (at less than 20% of the range) Instrumental error discrepancies in the volumetric flow rate measured by Azbil's fluid flow rate calibration equipment under standard conditions*1		
Measurable fluid	Fluid that does not clog the flow path and does not corrode or damage the fused silica glass tube or the PFA fitting used in the flow path. The measurement range differs for fluids other than water (H ₂ O).		
Accuracy- and repeatability-guaranteed fluid	Water (H ₂ O)		
Accuracy- and repeatability-guaranteed flow rate range (for water (H ₂ O))	0.2-10 mL/min	0.6-30 mL/min	1-50 mL/min
Temperature characteristic (where the fluid and ambient temperatures are the same)	Where the fluid and ambient temperatures are the same and within 10-35 °C Within 0.5% rdg. / °C of the output value under standard conditions*1		
Fluid temperature range (operation-guaranteed range)	5-50 °C (without freezing)		
Ambient temperature range (operation-guaranteed range)	5-50 °C (without condensation or freezing) (5-60 °C at transportation and storage)		
Ambient humidity (operation-guaranteed range)	10-90% RH (without condensation)		
Process fluid pressure range	0-500 kPa		
Pressure resistance	700 kPa		
Mounting orientation	Horizontal or vertical (flow direction: bottom to top)*2		
Straight pipe length	50 mm (for water (H ₂ O))		
Fitting pullout strength	30 N		
Drive power voltage	24 V DC $\pm 10\%$, 0.7 W max.		
Output signal	Instantaneous flow rate output: 1-5 V DC*3 (1 output) (External load resistance: 250 k Ω min. Maximum output voltage: 5.6 V) External contact output (open collector): event output or totalized flow pulse*4, 30 V DC, 30 mA max. (1 output)		
External contact input	1 Non-voltage contacts or open collector Allowable ON resistance: 250 Ω max. Allowable OFF resistance: 100 k Ω min. Allowable ON residual voltage: 0.8 V max. ON terminal current: 0.5 mA (when contact resistance is 250 Ω)		
Weight	85 g (including the mounting bracket but excluding the cable)		
Protection rating	IP65		
Noise immunity	EN61326-1, EN61326-2-3		

For details on the product specifications, refer to the user's manual (CP-SP-1421E).

*1. "Standard conditions" means that both the ambient and fluid temperatures are 23 °C. Please contact us for other conditions.

*2. For vertical mounting, there is an output shift of about $\pm 1\%$ rdg. in measurements when compared with horizontal mounting.

*3. If the flow rate is below the lowest measurable rate, the output signal is always 0% (1 V). Up to 115% (5.6 V) of the highest measurable flow rate can be output.

*4. A dedicated PC loader is required to change parameter settings.

Please read "Terms and Conditions" from the following URL before ordering and use.

<https://www.azbil.com/products/factory/order.html>

[Notice] Specifications are subject to change without notice.

No part of this publication may be reproduced or duplicated without the prior written permission of Azbil Corporation.

Other product names, model numbers and company names may be trademarks of the respective company.

Azbil Corporation

Advanced Automation Company

Yamatake Corporation changed its name to Azbil Corporation on April 1, 2012.

1-12-2 Kawana, Fujisawa
Kanagawa 251-8522 Japan

URL: <https://www.azbil.com>

1st Edition : Nov. 2017-SO

2nd Edition : Jun. 2019-SO